




Summit SL







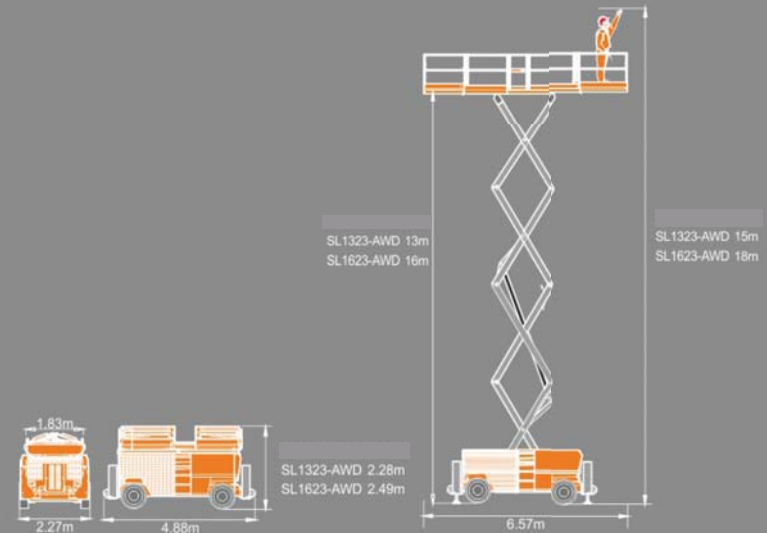


Diesel Self-Propelled
Rough Terrain Scissor Lift



For further information on Standard Features & Options

CALL 1300 623 622



	SL1323-AWD	SL1623-AWD
 S.W.L	680kg	680kg
S.W.L on extension	227kg	227kg
Max. Occupants	7	6
 Working height	15.00m	18.00m
Platform floor height	13.00m	16.00m
 Overall length (with/without outriggers)	4.88m/3.98m	4.88m/3.98m
Overall width	2.27m	2.27m
Overall height (standard/folded guardrails)	2.98m/2.28m	3.19m/2.49m
Platform size	3.98m X 1.83m	3.98m X 1.83m
Platform extension size	6.57m X 1.83m	6.57m X 1.83m
Ground clearance	0.22m	0.22m
Wheelbase	2.86m	2.86m
Turning radius (Inside/Outside)	2.35m/5.20m	2.35m/5.20m
 Engine		
Perkins 404D22	38kw/3000 rpm	38kw/3000 rpm
Kubota V2403-M-DI	36.5kw/2600 rpm	36.5kw/2600 rpm
 Travel speed (Stowed)	6.1km/h	6.1km/h
Travel speed (Raised)	1.1 km/h	1.1 km/h
Up/Down speed	70/52 sec	123/74 sec
Wind Rated	12.5m/s	12.5m/s
 Gradeability	50%	40%
Maximum working slope	2° /3°	2° /3°
 Hydraulic tank	130 L	130 L
Diesel tank	100 L	100 L
 Tyres	33X12-20	33X12-20
 Weight (with/without outriggers)	8200kg/7680kg	9190kg/8670kg

* Product specifications and prices are subject to change without notice or obligation
The photographs and/or drawings in this document are for illustrative purposes only